

---

## AVR102: Block Copy Routines

### Features

- Program Memory (Flash) to SRAM Copy Routine
- SRAM to SRAM Copy Routine
- Extremely Code Efficient Routines
  - Flash → SRAM: 6 Words,
  - SRAM → SRAM: 5 Words
- Runnable Test/Example Program

### Introduction

This application note contains routines for transfer of data blocks.

- Flash to SRAM Copy. Copies data blocks of sizes up to 256 bytes from any Flash address to any SRAM address.
- SRAM to SRAM copy. Copies data blocks of sizes up to 256 bytes from any SRAM source address to any SRAM destination address.

The routines are described in detail in the following sections.

### Flash to SRAM Copy – Subroutine “flash2ram”

Before calling this routine, the following input parameters must be set up by the user:

- “flashsize” – Register variable holding the size of the data block.
- Z-pointer – 2 x source address of first Flash block byte.
- Y-pointer – Destination address of first SRAM block byte.

The routine uses the “LPM”-instruction which is the one to use for data transfer from Flash to Register File. The instruction selects the Flash word (16-bit) pointed to by the 15 most significant bytes of the Z-pointer. If LSB of the Z-pointer is 0, the lower byte of the Flash word is returned, otherwise the higher byte is returned. The returned byte is always found in R0. To obtain the 15 MSBs of Z with the correct word value, the user must be careful to load Z with two times the address of the first double byte in the table. The program listing shows how to handle this precaution.

During data transfer, the auto-increment facility of the pointers is utilized. Writing to SRAM is done using the “ST Y+,Rs”-instruction. The “LPM”-instruction does not support auto-increment or decrement. The “ADIW” instruction is used to increment the 16-bit pointer.

The register variable “flashsize” is used as a loop counter in the routine.



---

8-bit **AVR**<sup>®</sup>  
Microcontroller


---

Application  
Note

Rev. 0933B-AVR-05/02



**Figure 1.** “flash2ram” Flow Chart

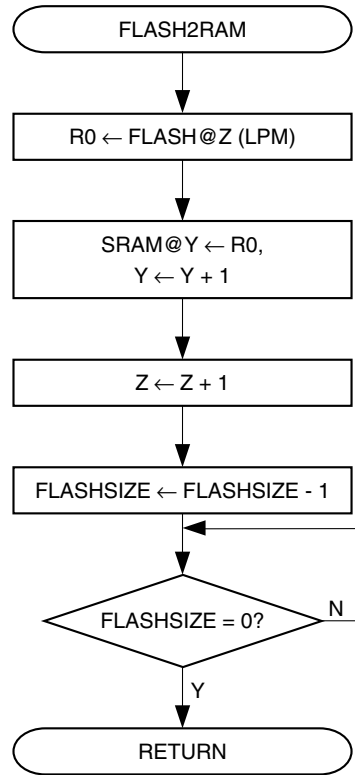

**Table 1.** “flash2ram” Register Usage

Register	Input	Internal	Output
R0		Temporary data storage	
R16	“flashsize” – Size of data block to copy		
R28	“YL” – Low address of SRAM data start		
R29	“YH” – High address of SRAM data start		
R30	“ZL” – Low address of Flash data start		
R31	“ZH” – High address of Flash data start		

**Table 2.** “flash2ram” Performance Figures

Parameter	Value
Code Size (Words)	5 + return
Execution Time	10 x (block size) + return
Register Usage	<ul style="list-style-type: none"> <li>• Low Registers :1</li> <li>• High Registers :1</li> <li>• Pointers :Y, Z</li> </ul>
Interrupts Usage	None
Peripherals Usage	None


**SRAM to SRAM  
Copy –  
Subroutine  
“ram2ram”**

Before calling this routine, the following input parameters must be set up by the user:

- “ramsize” – Register variable holding the size of the data block.
- Z-pointer – source address of first byte in block.
- Y-pointer – destination address of first byte in block.

By utilizing the pointer auto-increment facility, this routine is extremely compact. Moving one byte of data and incrementing both pointers requires two instructions only. Two more instructions are needed to decrement and check the register variable “ramsize” which is used as a loop counter in the routine. The data are temporarily stored in the register variable “ramtemp” during transfer.

**Figure 2.** “ram2ram” Flow Chart

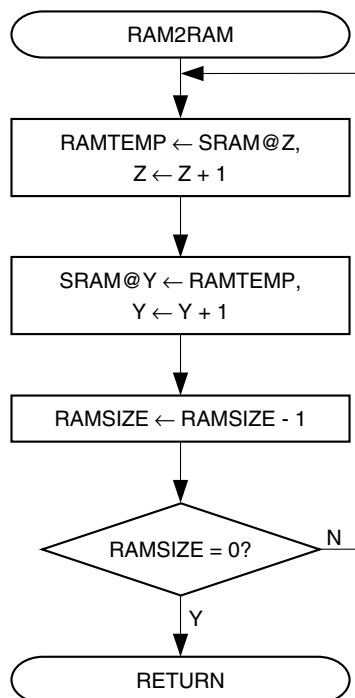

**Table 3.** “ram2ram” Register Usage

Register	Input	Internal	Output
R1		“ramtemp” – Temporary data storage	
R16	“ramsize” – Size of data block to copy		
R28	“YL” – Destination address low byte		
R29	“YH” – Destination address high byte		
R30	“ZL” – Source address low byte		
R31	“ZH” – Source address high byte		

**Table 4.** “flash2ram” Performance Figures

Parameter	Value
Code Size (Words)	4 + return
Execution Time	6 x (block size) + return
Register Usage	<ul style="list-style-type: none"> <li>• Low Registers :1</li> <li>• High Registers :1</li> <li>• Pointers :Y, Z</li> </ul>
Interrupts Usage	None
Peripheral Usage	None

## Test/Example Program

The application note program file contains a runnable test program which uses the copy application routines to copy 20 bytes of data from Flash to SRAM, then make a second copy of the data at another SRAM location. The test program is made for use with an AT90S8515. By changing including another “\*def.inc” file, the program can be used with any other AVR MCU with SRAM.



## Atmel Headquarters

### *Corporate Headquarters*

2325 Orchard Parkway  
San Jose, CA 95131  
TEL 1(408) 441-0311  
FAX 1(408) 487-2600

### *Europe*

Atmel Sarl  
Route des Arsenaux 41  
Case Postale 80  
CH-1705 Fribourg  
Switzerland  
TEL (41) 26-426-5555  
FAX (41) 26-426-5500

### *Asia*

Room 1219  
Chinachem Golden Plaza  
77 Mody Road Tsimhatsui  
East Kowloon  
Hong Kong  
TEL (852) 2721-9778  
FAX (852) 2722-1369

### *Japan*

9F, Tonetsu Shinkawa Bldg.  
1-24-8 Shinkawa  
Chuo-ku, Tokyo 104-0033  
Japan  
TEL (81) 3-3523-3551  
FAX (81) 3-3523-7581

## Atmel Operations

### *Memory*

2325 Orchard Parkway  
San Jose, CA 95131  
TEL 1(408) 441-0311  
FAX 1(408) 436-4314

### *Microcontrollers*

2325 Orchard Parkway  
San Jose, CA 95131  
TEL 1(408) 441-0311  
FAX 1(408) 436-4314

La Chantrerie  
BP 70602  
44306 Nantes Cedex 3, France  
TEL (33) 2-40-18-18-18  
FAX (33) 2-40-18-19-60

### *ASIC/ASSP/Smart Cards*

Zone Industrielle  
13106 Rousset Cedex, France  
TEL (33) 4-42-53-60-00  
FAX (33) 4-42-53-60-01

1150 East Cheyenne Mtn. Blvd.  
Colorado Springs, CO 80906  
TEL 1(719) 576-3300  
FAX 1(719) 540-1759

Scottish Enterprise Technology Park  
Maxwell Building  
East Kilbride G75 0QR, Scotland  
TEL (44) 1355-803-000  
FAX (44) 1355-242-743

### *RF/Automotive*

Theresienstrasse 2  
Postfach 3535  
74025 Heilbronn, Germany  
TEL (49) 71-31-67-0  
FAX (49) 71-31-67-2340

1150 East Cheyenne Mtn. Blvd.  
Colorado Springs, CO 80906  
TEL 1(719) 576-3300  
FAX 1(719) 540-1759

### *Biometrics/Imaging/Hi-Rel MPU/ High Speed Converters/RF Datacom*

Avenue de Rochepleine  
BP 123  
38521 Saint-Egreve Cedex, France  
TEL (33) 4-76-58-30-00  
FAX (33) 4-76-58-34-80

---

### *e-mail*

[literature@atmel.com](mailto:literature@atmel.com)

### *Web Site*

<http://www.atmel.com>

### © Atmel Corporation 2002.

Atmel Corporation makes no warranty for the use of its products, other than those expressly contained in the Company's standard warranty which is detailed in Atmel's Terms and Conditions located on the Company's web site. The Company assumes no responsibility for any errors which may appear in this document, reserves the right to change devices or specifications detailed herein at any time without notice, and does not make any commitment to update the information contained herein. No licenses to patents or other intellectual property of Atmel are granted by the Company in connection with the sale of Atmel products, expressly or by implication. Atmel's products are not authorized for use as critical components in life support devices or systems.

ATMEL® and AVR® are the registered trademarks of Atmel.

Other terms and product names may be the trademarks of others.



Printed on recycled paper.