2004 > G 2.0 DOHC > Body (Interior and Exterior)






REMOVAL AND INSTALLATION

NOTE

- -When removing and installing the rear bumper, an assistant is necessary.
- -Take care not to damage the front bumper and body.
- -Put on gloves to protect your hands.
- 1. Remove the following items:
 - A. Rear transverse trim (see page BD- 5).
 - B. Luggage side trim mounting clip (see page BD-5).
 - C.Rear combination lamp (A).
- 2. Remove the rear bumper cover (B) and rail (C).
- 3. Installation is the reverse of removal.

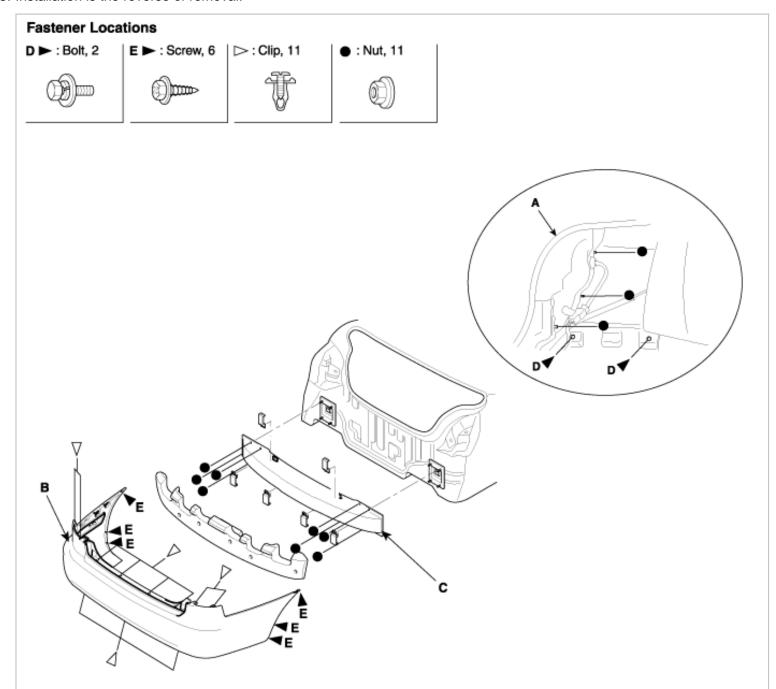

http	:://www.hmaservice.com/viewer/content.asp?vehicletype=PasEHY%5EXD13%5E2004%5Ebd%5E3%5Enone%5Enone%5Eshop%5E%24	
		=